

NON CONTACT RISING STEM BALL VALVE




On/Off metal-to-metal ball valve

Long life under extreme conditions

Size	1" ~ 36"
Bore	Reduced or full (piggable)
Pressure	150# ~ 2500#
Temperature	-196°C ~ 538°C
Connections	Wide choice on request
Materials	Wide choice on request



GENERAL INFORMATION

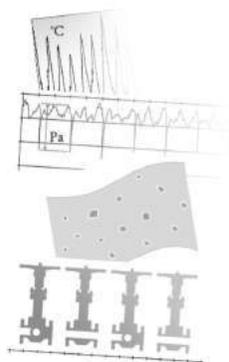

For any combination of the following conditions:

- Fluctuating and/or extreme temperature
- Fluctuating and/or extreme pressure
- Medium with solid particles
- Frequent switching

Characteristics:

- 100% tight shut off
- Friction-free opening and closing
- Low-torque operation
- Mechanically energized sealing
- Single metal-to-metal wear-resistant seat
- Bi-directional
- Self-cleaning
- In-line service
- Stem packing exchange while under full pressure in service
- Vertical or horizontal installation

APPLICATIONS

Molecular Sieve

For long life and easy maintenance
Shell Prelude, FPSO Tartaruga Verde, Ichthys Onshore LNG, Jazan Refinery, Yanbu Refinery

Hydrogen service (NACE)

For reliability under high pressure condition
Porvoo Refinery, Jubail Refinery, Jinling Refinery

Sand and slurry applications

For durable sealing surfaces
Grangemouth, Hammerfest LNG Plant

Emergency blow/shut down service

For fast opening and closing
Bayu Undan, Kristin Offshore Platform

Cryogenic service

For smooth operation under extreme temperature
HMC Polymers PP Plant, ColdBox Platform

Petrochemical

For long life and easy maintenance
Schkopau Germany, Saudi Kayan HDPE Project

Hot oil installations

For smooth operation under extreme temperature
Djeno Moho Bilondo Congo, Sakhalin Russian Federation


Steam service

Fields Girasol Y Moriche Colombia

HOW RSBV WORKS


Open position

Optimum flow is ensured by the design of the ball (red). To close the valve, the handwheel is turned in clockwise direction. The stem begins to lower and the ball begins to rotate.




Rotating

Continuous turning of the handwheel causes the precision spiral part of the stem to act against ball roll pins leading to 90° ball rotation. Rotation of the ball is friction-free.




Sealing

Nearing the end of the closing cycle, the ball has rotated full 90° without touching the seat (yellow). The internals are cleaned due to high flow.




Closed position

Final turns of the handwheel cause an angled flat surface on the lower stem to mechanically wedge the ball tightly against the seat.



CONTROL SEAL BENEFITS

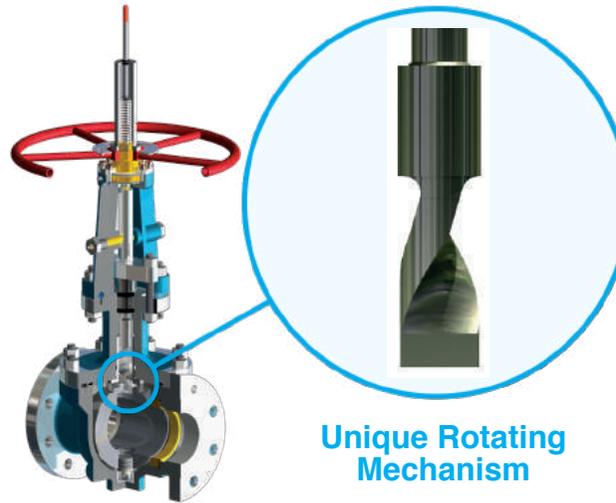

Unique Rotating Mechanism

Fast opening and closing

Due to strong metal rotating mechanism

Maintenance friendly

Due to rotating mechanism inside valve, stemguides and gland packing outside pressurized area

Less fugitive emissions

Due to no stem rotation, less stress on gland packing

Less spare parts needed

Due to less moving parts


Self-lubricating rotating mechanism

Due to rotating mechanism inside valve

CUSTOMER REQUIREMENTS

Produced project by project based on customer requirements:

- Valves can be supplied in a variety of materials and are also available in accordance with DIN standards
- Stem extension for extreme temperature
- Valves can be adjusted for underground service
- Sand&Slurry design for medium containing with up to 50% hard particles
- Bellow seal for lethal media and zero emission
- Valves can be supplied with handwheel, gearbox, electric actuator, pneumatic actuator, hydraulic actuator or any other actuation requested

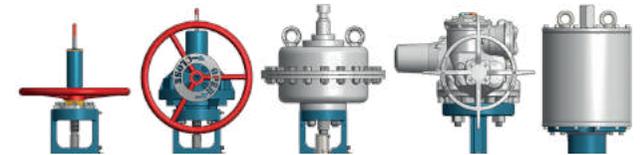

DESIGN STANDARDS

Design	API 6D, ASME B16.34
Face to Face dimensions	API 6D, ASME B16.10, B16.47
Flanges	ASME B16.5, B16.25
Fire Safe	ISO 10497, API 6FA, BS 6755
Fugitive Emission	ISO 15848, TÜV, Shell MESG SPE 77-312
Testing	API 598
Marking	CE, MSS-SP-25
Topworks	ISO 5210



CONTACT US

sales@controlseal.com
 marketing@controlseal.com
 T: + 971 562 148 800
 T: + 31 649 914 899
 T: +91 74182 38432